



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2

Perceived safety and predictability of human/AV interactions

<i>Deliverable Status</i>	FINAL
<i>Type</i>	REPORT
Dissemination level according to the Grant Agreement	PUBLIC



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

Project Information

Project Name:	SHAPE-IT – Supporting the interaction of Humans and Automated vehicles: Preparing for the Environment of Tomorrow
Grant Agreement:	860410
Project Duration:	1 October 2019 – 31 March 2024
Coordinator	Chalmers University of Technology

Document Information

Due Date	30Nov2023	Due date in months	M50
Date of submission	30Nov2023	Month of submission	M50

Status	Author	Date
Prepared by	Nikol Figalova, Xiaolin He, Chi Zhang, Sarang Jokhio	Oct 15 th , 2023
Reviewed	Martin Baumann, Olga Pollatos, Uni Ulm Meng Wang, TU Dresden	Oct 20 th , 2023
Approved	Jonas Bärgman, Chalmers	Oct 31 st , 2023



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

Please cite as:

Figalova, N., He, X., Zhang, C., Jokhio, S. (2023). *Perceived Safety and Predictability of Human/AV Interactions*. (Deliverable D1.2 in the EC ITN project SHAPE-IT). SHAPE-IT Consortium. <http://doi.org/10.17196/shape-it/2023/D1.2>

Acknowledgements

This is a deliverable from the SHAPE-IT project – a project that is multi-disciplinary and with substantial interaction across the early-stage researchers (ESRs), supervisors across the six host universities, and the associated partners of SHAPE-IT (see list below). We consequently want to sincerely thank all individuals and organizations that have contributed to the SHAPE-IT project. We especially want to thank the associated partners, for making the secondments support the ESRs research, but also as a way for the ESRs to get insights into how other organizations work. Finally, this project would not have been possible without the Marie Skłodowska-Curie program. That is, this project has received funding from the European Union's Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie grant agreement 860410.

List of Associated Partners

Asymptotic AI	https://www.asymptotic.ai
BMW	https://www.bmw.com
Institute of Transport Economics (TØI)	https://www.toi.no
SWOV	https://www.swov.nl
Toyota Motor Europe NV/SA (TME)	https://www.toyota-europe.com
Viscando	https://viscando.com
Volkswagen	https://www.vw.com
Volvo Cars	https://www.volvo.com
Zenseact	https://www.zenseact.com

The information presented in this document represents opinions, findings, or perspectives that may not necessarily reflect the official stance or views of the associated partners, nor of the involved universities. The opinions, conclusions, or results provided herein are intended for informational purposes only and should not be interpreted as endorsements or official positions of any of the organizations involved.

License: Creative Commons: [CC BY-NC-ND](https://creativecommons.org/licenses/by-nc-nd/4.0/)

Note 1: The term Early-Stage Researcher (ESR) is used extensively in this document. The ESRs are PhD candidates funded by the SHAPE-IT project.

Note 2: This document has been submitted to the EC for acceptance as a deliverable in the SHAPE-IT project. If changes are requested by the EC, the document will be updated.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

Contents

<i>Introduction</i>	<i>4</i>
<i>1. Perceived safety</i>	<i>6</i>
1.1. Definition.....	6
1.2. Measurement of perceived safety	7
1.3. Computation of perceived safety	8
1.4. Overview of results	9
1.5. Contribution and implications	11
1.6. Overview of published results on the topic	12
<i>2. Predictability in Human-Vehicle Interactions</i>	<i>13</i>
2.1. Definition of predictability.....	13
2.2. The importance of predictability in automated driving	13
2.3. Predictability during the control transitions	14
2.4. The importance of preparing drivers for a control transition.....	15
2.5. Increasing predictability of control transitions using visual reliability cues	15
2.6. Contribution and implications	18
2.7. Overview of published results on the topic	19
<i>3. Predicting Interactions.....</i>	<i>20</i>
3.1. Definition.....	20
3.2. Background and motivation.....	20
3.3. Methods for analysing and predicting the interaction	21
3.4. Contribution and implications	23
3.5. Overview of published results on the topic	24
<i>4. Conclusion</i>	<i>26</i>
<i>5. References.....</i>	<i>27</i>



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

Introduction

In the fast-evolving landscape of transportation, the integration of Automated Vehicles (AVs) holds immense promise for revolutionizing mobility and enhancing road safety. As we embark on this transformative journey, it is imperative that we investigate and understand the intricacies of the interactions between humans and AVs, because successful integration of AVs into the urban fabric hinges not only on their technical proficiency but also on human factors. Consequently, the fundamental premise of our exploration is that a thorough understanding of the perceived safety and predictability of AVs is of key importance.

Supporting the development of AVs that are perceived as safe requires the consideration and integration of different aspects and perspectives on predictability that are highly related to each other. On the one hand, the drivers and passengers inside the vehicle must, at least in principle, be able to understand and predict the behaviour of the AV, because any unexpected behaviour would reduce their acceptance and trust—and consequently their willingness to adopt this technology. To achieve this goal, the AV's behaviour (and, ideally, its underlying goals and plans) must be made transparent to the humans inside the vehicle. On the other hand, the behaviour—specifically the movement—of an AV depends in part on the movements of the surrounding humans. In highly dynamic, social environments such as urban traffic, the ability of AVs to predict the movement of vulnerable road users (VRUs) is therefore paramount. The AVs' proactive and anticipatory responses can enhance overall road safety and contribute to their efficient, harmonious integration into shared urban environments. Thus, to some degree, these prediction functions must be transparent to the humans inside the AV, to facilitate predictability of AV behaviour (so that the humans in the AVs know what to expect) and to ensure that they experience an appropriate level of perceived safety.

Although this deliverable is in SHAPE-IT work package 1 ("Safe and transparent interactions between AVs and humans inside the AVs"), we have included both in-AV and outside-AV perspectives. This decision was motivated by the interdependence of these two perspectives and the multi-disciplinary emphasis of SHAPE-IT. Essentially, we addressed the multifaceted challenges presented by the predictability of human movement behaviour from both inside and outside the AV. Our empirical results shed light on many nuances of the factors that



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

influence the subjective sense of safety experienced by individuals as they interact with AVs. Our approaches included subjective evaluations, neuroergonomics methodologies, and modelling approaches—as well as revelations about the degree to which AV-VRU interactions can be accurately predicted.

In the three chapters of this deliverable, we will explain our findings, which reveal the complex tapestry of human-AV interactions. Results from empirical and modelling research on the perceived safety of AVs and the predictability of human-AV interactions will be presented. By revealing the interwoven threads of perceived safety and predictability, we hope to contribute not only to academic discourse but also to the practical implementation of AV technologies. Our endeavour aligns seamlessly with the European Union's commitment to fostering innovation that prioritizes human-centric design, thereby ensuring that future mobility is not just automated but, more importantly, safe, and predictable for all.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

1. Perceived safety

1.1. Definition

Risk, an essential determinant of perceived safety, is defined as *“the combination of the probability of occurrence of harm and the severity of that harm conditions”* (ISO 26262-1). A certain level of risk always exists, but some risks are *“judged to be unacceptable in a certain context according to valid societal moral concepts”* (ISO 26262-1).

Based on the definition of risk, functional safety can be objectively defined as the *“absence of unreasonable risk due to hazards caused by malfunctioning behaviour of electrical and/or electronic systems”* (ISO 26262-1). This definition gives an accurate and precise scope for risk and functional safety that has been broadly applied in many studies. In the context of automated driving systems, the definition implies zero accidents caused by systems failures in automobiles.

Perceived safety and *perceived risk* are complementary psychological concepts describing the subjective evaluation of safety by users of automated driving systems and other road users interacting with automated vehicles (AVs; Griffin et al., 2020; Kolekar et al., 2020). Perceived risk can differ from actual operational risk (Griffin et al., 2020; Kolekar et al., 2020). Many researchers have studied perceived safety, but only those who tried to clarify its theoretical aspects offered a definition. Here are three such definitions: Mössinger (2017) defined perceived safety as not actual safety but the feeling of safety people have when they trust their welfare to a machine whose workings are not transparent; Osswald et al. (2012) defined it as the degree to which an individual believes that using AVs will not harm their well-being; and lastly Xu et al. (2018) defined it as an environment in which drivers and passengers can feel relaxed, safe, and comfortable while driving. These definitions describe a state of high perceived safety: users are not worried about injury and feel relaxed and comfortable. In contrast, if the perceived safety is low, users are worried and feel uneasy about using the automation.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

1.2. Measurement of perceived safety

Most of the existing studies evaluate perceived safety in a specific scenario. The lack of actual perceived-safety data from occupants in many specific driving scenarios is a significant knowledge gap. Therefore, measurement methods that are applicable to and comparable over many different driving scenarios are of great importance in evaluating the perceived safety of occupants.

A questionnaire is the most common way to measure perceived safety in most studies because it is convenient and non-intrusive (Choi & Ji, 2015; Kraus et al., 2020; Nordhoff et al., 2020). Furthermore, their crucial advantage is that self-reported ratings from occupants are reliable (Wei, Bolton, & Humphrey, 2019). However, this kind of measurement focuses on recording the general views of those participants based on their own experience. To obtain more specific results, other researchers asked the participants to fill out the questionnaire after a particular experience with driving automation, improving the reliability of the results (Xu et al., 2018; Zoellick et al., 2019; He et al., 2022). There are other drawbacks to questionnaires, such as it being inherent problematic to get responses as a time-series (e.g., in an experiment) and a heavy memory load for the participants.

Continuous measurement devices, as variants of questionnaires, address these drawbacks. Researchers have used handset controls (Rossner & Bullinger, 2019), sliders (Saffarian et al., 2012), pressure sensors (He et al., 2022), rotary bars (Cleij et al., 2019), and angle sensors (Kolekar et al., 2020) to collect ratings of perceived safety or trust from participants. After ensuring the reliability and validity of the measures obtained with these devices, they can provide continuous data for analysis and modelling; at the same time, they can reduce the participants' memory load. In one application, He et al. (2022) proved that the peak of continuous ratings from a pressure sensor is highly correlated with the oral rating of perceived risk.

In addition to subjective ratings, surrogate measures such as physiological and behaviour indicators are also considered to reflect participants' perceived safety (Beggiato et al., 2019; Tenhundfeld et al., 2019; Wang & Akar, 2019). As with continuous measurement devices, participants do not need to memorise the scenario or think about giving a rating during



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

automated driving, resulting in a lower mental workload. However, additional devices and sensors must be attached to participants' bodies, which is likely to sharply reduce participants' willingness to join the experiment. Most importantly, these indicators are simultaneously influenced by factors other than perceived safety, such as current driving task and steering behaviour, which makes data analysis more complex.

Surrogate metrics of safety (SMoS) can also be used to measure perceived safety. Examples include minimum time to collision (TTC), inverse time to collision (iTTC) (Kiefer et al., 2005), the potential index for collision with urgent deceleration (PICUD) (Van Beinum et al., 2016), and Driving Risk field (Mullakkal-babu et al., 2020). Although these metrics have been proven effective in measuring actual road safety, whether they capture perceived safety adequately remains largely unknown. However, appropriate experiments can be designed to establish the connections between SMoS and perceived safety.

1.3. Computation of perceived safety

A few studies are integrating perceived safety into driving automation design in various ways, such as in decisions about control transitions in full-range Adaptive Cruise Control (Varotto et al., 2018), collision warning system design (Kiefer et al., 2005, 2006), perceived-safety calculations in roundabout scenarios (Wang et al., 2006), perceived-safety calculations for tram drivers (Tzouras et al., 2020), and a driver's belief model about the probability of an event occurring (Kolekar et al., 2020). This research uses risk allostasis theory, driver risk field, regression model, and some SMoS to build the computational models. These models can calculate the current perceived safety of the occupants dynamically and can probably be used to control the vehicle's behaviour in order to maintain a low perceived risk. As such, the models can be considered dynamic. However, most of them are limited to specific scenarios and levels of automation.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

1.4. Overview of results

The work of ESR12 is the study of perceived safety, its relation to trust and acceptance in driving automation, and its enhancement. Firstly, the factors influencing perceived safety were determined with a simulator experiment. In a second simulator experiment, several user interfaces (UIs) were tested for their influence on perceived safety, leading to recommendations for UI design to enhance perceived safety and trust. Finally, some efforts were made to build a computational model of perceived risk to estimate human drivers' perceived risk in real-time driving. This model also explains the mechanism of human drivers' risk perception.

The first experiment simulated 18 merging events with different merging distances and braking intensities on a 2-lane highway. Figure 1 shows an example of the simulated events. The participants were asked to monitor the scenario as fall-back-ready drivers in a vehicle with SAE Level 2 driving automation. During the drive, they used a pressure sensor to continuously give a perceived-risk rating from 0-10; these ratings constitute the continuous perceived-risk data. After each event, the participants were also asked to give a verbal rating from 0-10 of the previous event's perceived risk, which constitutes the discrete event-based perceived-risk data. The corresponding kinematic data (e.g., position, speed, and acceleration of the subject vehicle and neighbouring vehicles) were also collected.

A perceived-risk regression model shows that the motion relative to neighbouring road users accounts for most of the variation in perceived risk. Our models show modest effects of personal characteristics: experienced drivers are less sensitive to risk and trust automation more, while female participants reported higher perceived risk than males. However, perceived risk and trust are highly correlated and have similar determinants. Continuous perceived risk accurately reflects participants' verbal post-event rating of perceived risk, brakes are an effective indicator of high perceived risk and low trust, and pupil diameter correlates with the perceived risk in the most critical events. The events increased heart rate, but we found no correlation with event criticality.

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions



Figure 1 *Video stream of a simulated merging event which included challenging braking*

In the second simulator experiment, five different interfaces (see the example in Figure 2) were designed with different information types and modalities. The simulation scenario was the same as in the first experiment above. The results indicate that the auditory modality providing manoeuvre information can help human drivers understand automation, contributing to enhancing perceived safety and trust.



Figure 2 *Interior of DAVSi driving simulator with designed user interfaces*

The data collected from the two simulator experiments were used to build and validate a new computational perceived-risk model, based on the potential collision avoidance difficulty (PCAD) for drivers of SAE Level 2 AVs. The perceived risk of the new model is visualised in Figure 3. The model performs well in terms of computation accuracy and detection rate, and fits the tendency of human drivers' perceived risk quite well.

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

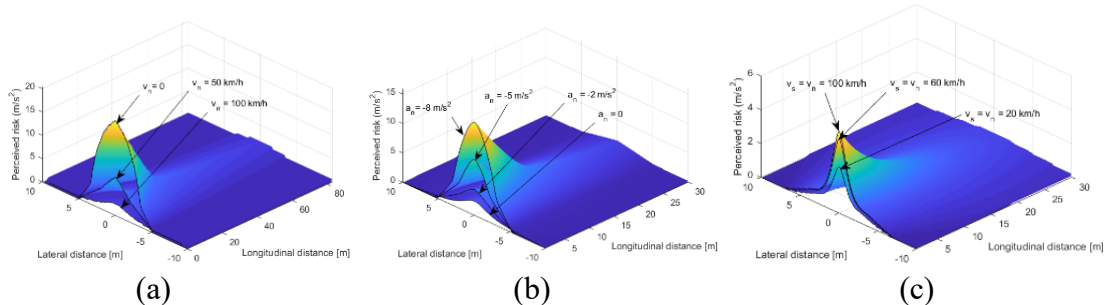


Figure 3 Perceived-risk visualisation: The ego vehicle has (a) different velocities relative to the leading vehicle; (b) different accelerations; (c) different ego velocities

1.5. Contribution and implications

The exploration of perceived safety in automated driving systems, as detailed in this research, has important implications for various fields and makes the following significant contributions:

1. Understanding Human Interaction with Automation: This work provides insights into humans' perceived safety regarding technology, vital for the design and acceptance of AVs.
2. Innovative Measurement Techniques: By introducing novel measurement devices and methodologies, the research paves the way for more accurate, real-time evaluations of perceived safety, enhancing data reliability.
3. Integration with Design and Control: The development of dynamic models which can be integrated into driving automation design represents a step towards creating vehicles that adapt to human perceptions. This advance has implications for enhancing user experience and could be key to the widespread adoption of AVs.
4. Enhancing Trust and Acceptance: Through experiments and interface designs, the research identifies ways to enhance perceived safety and trust in automated driving. These findings have direct implications for automotive manufacturers aiming to build user-friendly systems.
5. Policy and Regulation Considerations: The clear definitions and standards provided contribute to a framework that can guide regulations and policies, ensuring the safety and acceptability of automated driving systems.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

In conclusion, the contributions of this research extend beyond the technical domain, influencing the way we understand, design, regulate, and interact with automated driving systems. It lays a foundation for a human-centric approach to automation, aligning with human perceptions and values.

1.6. Overview of published results on the topic

He, X., Stapel, J., Wang, M., & Happee, R. (2022). Modelling perceived risk and trust in driving automation reacting to merging and braking vehicles. *Transportation Research Part F: Traffic Psychology and Behaviour*, 86(July 2021), 178–195.

<https://doi.org/10.1016/j.trf.2022.02.016>

Lu, C., He, X., Lint, H. Van, Tu, H., Happee, R., & Wang, M. (2021). Performance evaluation of surrogate measures of safety with naturalistic driving data. *Accident Analysis and Prevention*, 162(August), 106403. <https://doi.org/10.1016/j.aap.2021.106403>

Mullakkal-Babu, F. A., Wang, M., He, X., van Arem, B., & Happee, R. (2020). Probabilistic field approach for motorway driving risk assessment. *Transportation Research Part C: Emerging Technologies*, 118(July), 102716. <https://doi.org/10.1016/j.trc.2020.102716>

Nordhoff, S., Stapel, J., Xiaolin He, Gentner, A., & Happee, R. (2021). Perceived safety and trust in SAE Level 2 partially automated cars : Results from an online questionnaire. 1–21. <https://doi.org/10.1371/journal.pone.0260953>



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

2. Predictability in Human-Vehicle Interactions

2.1. Definition of predictability

Srivastava and Sarrafzadeh (2002) define predictability as *“the quantified form of accuracy”*, while the English dictionary defines it as *“the quality of being regarded as likely to happen, as behaviour or an event”* (Dictionary.com, 2023). In the field of human-computer interaction, predictability means the *“support for the user to determine the effect of future action based on past interaction history”* (Sandamal, 2020). Therefore, we assume that predictability is multifaceted, and we must understand the context in which the term is used in order to define it. In this text, we define predictability as *the property of a system or a situation which allows humans or automated systems to determine the future behaviour of other humans or automated systems*.

2.2. The importance of predictability in automated driving

Predictability is vital to decision-making in many fields, including transport (Chand, 2021). It is a crucial concept in automated driving. To ensure safety in mixed traffic, AVs should be predictable from both the inside and outside perspectives.

From the inside perspective, AV behaviour should be predictable for the operator. The growing awareness of the importance of predictability enhances the shift from unexpected take-over situations to HMI design for predictable transitions (Hecht et al., 2020). Predictable behaviour of the AV can lead to reduced reaction times and improved safety for automated driving (Hou, 2021). Predictability is also a key factor contributing to the perceived safety of passengers (Nordhoff et al., 2020).

From the outside perspective, we must consider two areas where predictability is necessary. First, the movements of AVs may be less familiar and therefore less predictable for other road users than the movements of manually-driven vehicles (Surden & Williams, 2016). Therefore, we should try to design predictable AV behaviour to increase mixed traffic safety. Second, the



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

environments in which AVs operate are diverse and can change rapidly (Ito, 2019). Therefore, AV systems must successfully understand and predict the behaviour of other road users in a variety of situations (Dong & Dolan, 2018).

2.3. Predictability during the control transitions

Automated driving places different demands on drivers compared to manual driving. When driving manually (Level 0 automation), drivers control all aspects of the vehicle and must monitor their surroundings. They must stay alert to events arising from any direction, integrate information from various senses, and subsequently create a unified perception of the world (Spence et al., 2020). Additionally, drivers are required to constantly update their perceptual-motor loop and stay calibrated to the vehicle's dynamics.

SAE Level 2 AVs can perform both longitudinal and lateral control of the vehicle, but require drivers to continuously supervise them and respond immediately to automation failures. Level 3 AV operators are allowed to divert their attention from driving to other activities (SAE, 2013) so they might not be paying attention to their surroundings before a take-over request (TOR). Therefore, it is crucial that highly automated vehicles recognise the limitations of the automation's environment perception and inform the driver of a possible control transition ahead of time (Dietmayer, 2016).

When TORs are more predictable, drivers may have more time to get back in the loop (Merat et al., 2014) and adjust to the vehicle dynamics (Mole et al., 2019). Drivers can understand the status and forecast future states while perceiving the complicated traffic environment. More time to react boosts situation awareness and facilitates decision-making, improving take-over behaviour (Endsley, 1995).

To increase predictability, future systems should provide continuous feedback on the automation states (Norman, 1990) and offer further assistance before the control transition (Vogelpohl, 2018). To avoid additional demands on the processing power of the drivers, the support feedback might be sent via the peripheral vision channel (Wickens, 2008). Drivers will



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

have enough time to assess the current situation and get acclimated to the vehicle dynamics when the TOR is predictable, leading to a smooth transfer of control (Shahini et al., 2022).

2.4. The importance of preparing drivers for a control transition

Since SAE Level 3 AVs allow drivers to engage in non-driving-related activities, the drivers only need to respond to TORs when the AV reaches its operational boundary. The switch in attention, however, impacts cognitive processes. Drivers of AVs experience higher fatigue (Figalova et al., 2023a; Matthews et al., 2019) and tend to mind-wander (Galera et al., 2012; Baldwin et al., 2017). Fatigue impairs the ability to operate a vehicle safely (e.g., Markkula et al., 2017; Higgins et al., 2017). Subsequently, drivers' ability to stay alert is impaired (Bieg et al., 2020; Vogelpohl et al., 2019). Moreover, drivers' ability to incorporate environmental information might be jeopardised (Galera et al., 2012); they pay less attention to their environment (Figalova et al., 2023b).

Even though vehicle automation increases drivers' fatigue and reduces their attention, drivers will be occasionally requested to take over control of the vehicle in Level 3 driving. An improper response to a TOR might create a safety-critical situation. It is therefore crucial to design driver-vehicle interactions in a way that mitigate the safety risks originating from fatigue and inattention.

2.5. Increasing predictability of control transitions using visual reliability cues

As part of her PhD project, ESR1 conducted a driving-simulator experiment to evaluate the efficiency of a four-stage likelihood alarm system conveying the current level of reliability of drivers' performance via ambient lightning (Figalova et al., 2022). ESR6 supported in the preparation and planning of a pilot study for this experiment and by discussing different concepts of automation transparency with ESR1 and how they could be applied to such an likelihood alarm system. The ambient alarm system comprised an ambient light in the vehicle's

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

cabin: a green, yellow, orange, or red-light cue was delivered via an LED strip mounted around the vehicle's windshield. This system communicates reliability information using the unoccupied peripheral vision channel to avoid a system that is either overly conservative and prone to errors or overly liberal, resulting in the cry-wolf effect (Zirk et al., 2020).



Figure 4 *The apparatus of the experiment*

Participants performed a non-driving secondary task while operating a simulated Level 3 SAE (2013) vehicle. There were four trials, each around ten minutes long. They experienced ten TORs in total, each of which required drivers to disengage from the secondary task, understand the current traffic situation, deactivate the automation, perform the necessary manoeuvre (overtake the slow lead vehicle), re-activate the automation, and return to the secondary task. A between-group design was implemented to compare one group of drivers equipped with the ambient alarm system and a second group of drivers who were not.

We measured longitudinal vehicle jerk as an indicator of aggressive driving style (Feng et al., 2017). The self-reported mental workload was assessed using the DALI questionnaire (Pauzié, 2008), and electroencephalography (EEG) measured brain activity in order to obtain psychophysiological indices of mental workload. Based on reports by other EEG researchers, we focused on the power in the theta (4-8 Hz) and alpha (8-13 Hz) frequency ranges, as changes in these are often referred to in the context of mental workload (Lohani et al., 2019).

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

According to the driving performance data, in the first half of the experiment, drivers who had ambient light responded comparably to those who didn't. However, in the second half of the experiment, the drivers without ambient light exhibited an increase in vehicle jerk, while the drivers with ambient light exhibited no difference, or even a decrease. This result implies that individuals in the latter group performed better: they appeared to have greater control of the vehicle and better take-over performance, since their driving style was calmer and more predictable.

The increased mental workload was not a factor in the improved driving performance. Both groups perceived the same levels of mental workload, according to self-report and psychophysiological measures. Our findings imply that the task was equally difficult for all drivers regardless of ambient light; the ambient light provides information without adding to the cognitive load. Similar conclusions were reached by other researchers of ambient displays. The displays appear to help drivers deal with TORs and lane changes, as well as helping them manage their vehicle speed.

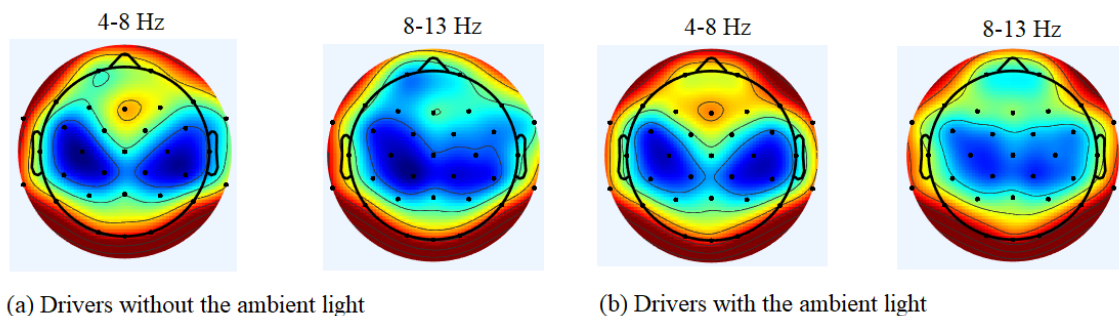


Figure 5 The theta (4-8 Hz) and alpha (8-13 Hz) power over the four consecutive trials. No significant differences in oscillatory brain activity were found for any of the trials.

The four stages of the ambient light were acceptable and pleasant, according to participant reports and remarks. Moreover, participants often reported that they perceived the four stages rather as only two (green and yellow as less critical, orange and red as more critical), creating a sort of conservative binary alarm system. Based on prior literature, this effect was predicted. We advise utilising the four-stage likelihood setting in reliability communication. The four



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

stages allow a fine-grained communication and better user experience compared to binary systems while keeping their efficiency, safety, and performance of a two-stage alarm.

Overall, we developed and tested a new, four-stage likelihood ambient alarm system conveying the current reliability of the automated system. Such ambient alarm system setting has, to the best of our knowledge, not been studied before. Moreover, we successfully applied a novel neuroergonomic approach to evaluate our results in a driving-experiment study. The technical knowledge developed during this experiment helped us design further experiments employing EEG in the context of automated driving.

2.6. Contribution and implications

The ability to predict human-AV interactions has major safety implications. Our results contribute to the state of the art by presenting new empirical evidence of the cognitive processes during automated driving. The results suggest that drivers of AVs experience higher levels of fatigue compared to drivers of manual vehicles (Figalova et al., 2023a) and that they allocate fewer attentional resources to processing environmental information (Figalova et al., 2022b). It is therefore crucial to design AVs which consider drivers' fatigue and inattention, especially during extended periods of automated driving.

Moreover, we developed and tested an ambient lighting system which helps drivers perform better during the transition of control. This finding can be further elaborated on in the research domain (e.g., by investigating the best possible hardware and colour setting of the ambient lighting), as well as in the design domain (by implementing our findings in the design of future in-vehicle environments).



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

2.7. Overview of published results on the topic

- Figalová, N., Chuang, L. L., Pichen, J., Baumann, M., & Pollatos, O. (2022). Ambient light conveying reliability improves drivers' take-over performance without increasing mental workload. *Multimodal Technologies and Interaction*, 6(9), 73. <https://doi.org/10.3390/mti6090073>
- Figalová, N., Bieg, H. J., Schulz, M., Pichen, J., Baumann, M., Chuang, L. L., & Pollatos, O. (2023a). Fatigue and mental underload further pronounced in L3 conditionally automated driving: Results from an EEG experiment on a test track. In *Companion Proceedings of the 28th International Conference on Intelligent User Interfaces* (pp. 64-67).
- Figalová, N., Bieg, H. J., Reiser, J. E., Liu, Y. C., Baumann, M., Chuang, L., & Pollatos, O. (2023b). From Driver to Supervisor: Comparing Cognitive Load and EEG-based Attention Allocation across Automation Levels. *arXiv preprint arXiv:2306.08477*.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

3. Predicting Interactions

3.1. Definition

We focus on the interaction in the road traffic domain in this project. Markkula et al. (2020) provided a conceptual framework for understanding interactive behaviour in human and road traffic, defining interaction as a situation where the behaviour of at least two road users is influenced by the possibility of occupying the same space simultaneously. Lehsing et al. (2016) focused on social interaction in traffic, and defined “interaction” as a goal-oriented, mutual process of behavioural adaptation by individuals through verbal and non-verbal communication. Rasouli and Tsotsos (2019) provided a comprehensive review of pedestrian behaviour considering both pedestrian-driver interactions and pedestrian-autonomous vehicles interactions, and stated that it is crucial to communicate and understand other road users’ intentions. Interaction is important for the understanding and prediction of the behaviour of road users.

3.2. Background and motivation

Driving safety is crucial. According to World Health Organization (WHO, 2018), every year, about 1.3 million people across the globe are killed by traffic crashes on the road; 310,000 are pedestrians, accounting for about 23% of all traffic deaths. This is an unacceptably high number that we need to reduce.

The vehicle automation industry has made many efforts to use technology to facilitate driving and improve driving safety. However, many risk factors are still causing road accidents; one of the main factors is human error (Rumar, 1999). Prediction technologies can provide information about vulnerable road users in advance, to reduce the cognitive load of the driver and provide more reaction time for the driving system (Zhang, 2022). A safe, intelligent vehicle must be able to use this technology to perceive and predict the behaviour of other road users around it.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

Pedestrians are among the most vulnerable road users, and they need protection. Research shows that most pedestrian-vehicle collisions happen when pedestrians cross the road (Do et al., 2014), because in this situation they tend to interact with vehicles and other road users. By understanding these interactions, we can better predict the behaviour of pedestrians and reduce the risk of collisions (Zhang, 2022, Zhang and Berger, 2023). For AVs, predicting pedestrian behaviour is crucial for ensuring road safety.

Overall, the ability to understand and predict interactions between pedestrians and vehicles or AVs is vital for predicting the behaviour of pedestrians, providing more information for AVs and aiding self-driving (Zhang and Berger, 2023). Further, an AV whose behaviour is based on predicting the behaviour of other road users might itself be more predictable to drivers, and could therefore increase their perceived safety.

3.3. Methods for analysing and predicting the interaction

The interactions between pedestrians and AVs are relatively complicated (Zhang and Berger, 2023). In real-world traffic, various factors can influence the interaction. These factors include the behaviour and characteristics of the pedestrians such as their posture, heading direction, age, gender, and even their personalities (Zhang et al., 2023a), and the status of the vehicles such as their speed, acceleration, direction, or size (Zhang and Berger, 2023). The vehicle's behaviour can also influence the interaction if the vehicle is a human-driven car (Zhang et al., 2023a). In addition, the environment, which includes factors such as the road's condition (width, number of lanes), traffic signals, and traffic signs, can also influence the interaction.

Researchers have tried various methods to analyse and predict the interactions. For example, Rasouli et al. (Rasouli et al., 2019) reviewed existing studies on AV-pedestrian interaction. They identified two types of interaction studies. The first looks at how the vehicle communicates with pedestrians. The second seeks to understand the pedestrians' intentions. Our research, the second type, mainly focused on understanding and predicting pedestrians' intentions.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

As we highlighted, many factors influence a pedestrian's behaviour and interactions. Due to this complexity, the conventional method of analysis cannot consistently and precisely anticipate pedestrian behaviour. Fortunately, artificial intelligence tools can handle the training and analyse pedestrian interactions (Zhang et al., 2023a). We used artificial intelligence techniques to identify the interactions between pedestrians and vehicles and understand pedestrian behaviour patterns. We modelled the interactions of pedestrians and evaluated the techniques' predictions of pedestrian behaviour, including the pedestrians' trajectories and crossing actions.

To predict the future trajectories of pedestrians, prediction models were built that consider the pedestrian-vehicle and pedestrian-AV interactions. We used the following two measures to report prediction errors and assess model performance (Alahi et al., 2016):

- **The Average Displacement Error (ADE):** the average distance gap between ground truth and prediction trajectories over all predicted time steps.
- **The Final Displacement Error (FDE):** the average distance gap between ground truth and prediction trajectories for the last predicted time step.

To predict pedestrians' crossing action, prediction models that consider the features of pedestrians and vehicles were built. Pedestrians' perceived risk can also be considered in the prediction. The following two measures can be used to evaluate the accuracy of the crossing decision prediction, by comparing the observed crossing decisions (who crossed first) after the communication between pedestrian and vehicle to the predictions.

- The accuracy is defined as: $\text{Accuracy} = (\text{TP} + \text{TN}) / (\text{P} + \text{N})$
- The F1 score is defined as: $\text{F1} = 2\text{TP} / (2\text{TP} + \text{FP} + \text{FN})$

Where P is the number of positives, N is the number of negatives, TP denotes true positives, TN denotes true negatives, FP denotes false positives, and FN denotes false negatives.

The modelling of pedestrian-vehicle interactions can be indirectly assessed by evaluating the model's accuracy at predicting pedestrian behaviour. The better the model performs, the better the interactions are modelled.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

3.4. Contribution and implications

Pedestrians interact with all sorts of users, from other vulnerable road users to drivers (of AVs as well as manually driven vehicles). All of these interactions provide information about pedestrian behaviour which can be used to improve prediction models. However, it is hard to evaluate the interactions directly because it is hard to label them to obtain a ground truth. Therefore, we evaluate the interaction predictions by comparing them to the interaction results, i.e. the actual pedestrian behaviour. Our research predicts pedestrian behaviour by considering their interactions with other road users. The original contributions of our research are listed below.

1. We reviewed a large selection of existing papers that used deep learning methods for pedestrian behaviour prediction (Zhang and Berger, 2023). In this study, we provided a comprehensive review of deep learning-based approaches for pedestrian behaviour prediction, and provided a detailed overview of existing datasets and evaluation metrics. We analysed, compared, and discussed the performance of approaches presented in existing works, identified research gaps, and outlined potential future research directions. The interactions of pedestrians played an important role in predicting pedestrian behaviour.
2. We built deep learning models that predict pedestrian trajectories by considering the interactions between pedestrians in crowds (Zhang et al. 2021). We proposed the Social Interaction-Weighted Spatio-Temporal Convolutional Neural Network, a novel approach to capture interactions between pedestrians better and faster.
3. We also considered the interactions between pedestrians and vehicles (Zhang and Berger, 2022a) when predicting pedestrian trajectories. We proposed the Pedestrian-Vehicle Interaction (PVI) extractor to predict pedestrian trajectories, which improved the performance of both LSTM-based and Conv-based prediction networks.
4. We analysed the interactions between pedestrians and AVs (Zhang and Berger, 2022b). We investigated interaction factors using deep learning methods: factors relevant for pedestrian interactions, vehicle interactions, and AV interactions can all influence the accuracy of predictions about pedestrians' future trajectories.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

5. To better understand whether a model trained on one dataset can be transferred to other scenarios, we also investigated the transferability of the models (Zhang et al. 2023b). Spectrum features can represent the pedestrian's motion pattern better compared to not using spectrum information and they improve the model's performance. The proposed model demonstrates good prediction accuracy when transferred to target datasets without any prior knowledge.
6. In addition to trajectories, we also investigated the interaction outcomes, especially the crossing decisions of pedestrians at unsignalized crossings (Zhang et al. 2023a). We built machine learning models to predict pedestrians' crossing behaviour when they interact with vehicles at unsignalized crossings. The accuracy of predictions about pedestrian crossing decisions, crossing initiation times, and crossing durations are improved by machine learning models.

3.5. Overview of published results on the topic

- Zhang, C., Berger, C., & Dozza, M. (2021). Social-IWSTCNN: A social interaction-weighted spatio- temporal convolutional neural network for pedestrian trajectory prediction in urban traffic scenarios. *2021 IEEE Intelligent Vehicles Symposium (IV)*. <https://doi.org/10.1109/iv48863.2021.9575958>
- Zhang, C., & Berger, C. (2022). Learning the pedestrian-vehicle interaction for pedestrian trajectory prediction. *2022 8th International Conference on Control, Automation and Robotics (ICCAR)*. <https://doi.org/10.1109/iccar55106.2022.9782673>
- Zhang, C., & Berger, C. (2022). Analysing Factors Influencing Pedestrian Behavior in Urban Traffic Scenarios Using Deep Learning. Accepted in Transport Research Arena (TRA), 2022. Elsevier.
- Zhang, C. (2022). Predicting Pedestrian Behavior in Urban Traffic Scenarios Using Deep Learning Methods (Doctoral Licentiate thesis, Chalmers University of Technology).



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

Zhang, C. (2022). Predicting Pedestrian Behavior in Urban Traffic Scenarios Using Deep Learning Methods (Doctoral Licentiate thesis, Chalmers University of Technology).

Zhang, C., & Berger, C. (2023). Pedestrian Behavior Prediction Using Deep Learning Methods for Urban Scenarios: A Review. IEEE Transactions on Intelligent Transportation Systems. <https://doi.org/10.1109/tits.2023.3281393>

Zhang, C., Ni, Z., & Berger, C. (2023). Spatial-Temporal-Spectral LSTM: A Transferable Model for Pedestrian Trajectory Prediction. IEEE Transactions on Intelligent Vehicles. <https://doi.org/10.1109/tiv.2023.3285804>

Zhang, C., Kalantari, A. H., Yang, Y., Ni, Z., Markkula, G., Merat, N., & Berger, C. (2023b). Cross or Wait? Predicting Pedestrian Interaction Outcomes at Unsignalized Crossings. 2023 IEEE Intelligent Vehicles Symposium (IV). <https://doi.org/10.1109/IV55152.2023.10186616>



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

4. Conclusion

To ensure a broad acceptance of AVs in urban environments, these vehicles must not only be safe and provide a significant contribution to the overall traffic safety, we also must design them to be desirable for the users. One of the crucial factors influencing desirability is perceived safety: it is impossible to implement AVs when their behaviour is not perceived as safe by the users. However, perceived safety is subjective, and a better understanding of factors leading to perceived safety is needed. The studies reported in this deliverable provided first steps and interesting results about these factors.

One of the crucial factors that influence whether an AV is perceived as safe is, besides its actual behaviour, whether this behaviour is predictable for the driver inside the vehicle and the road users outside the vehicle. In the studies presented in this deliverable, strategies to increase the predictability of one of the most safety-critical events in the operation of SAE Level 3 AVs – the transition of control from the automation to the driver because of a system limit – was investigated. The results indicate that conveying the level of reliability at which the vehicle is currently operating to the driver is a promising approach to increase the predictability of AV behaviour for drivers, especially for safety-critical situations.

Whereas the above focused on the perception and evaluation of AV behaviour by human drivers or other human road users and on the question how to make these AVs predictable and objectively and subjectively safe, by, for example making their state more transparent, for a safe operation of an AV the AV itself must also be able to understand its environment. An important and crucial aspect of this environment are other road users. Understanding these other road users means for an AV that it possesses behavioural models of them integrated into the algorithms. These models enable the AV to predict the behaviour of other road users and adapt the behaviour according to these predictions. This capability in turn will generate AV behaviour that is in accordance with the human road users' expectations and therefore is predictable for them. This will not only lead to an increased perceived safety of these vehicles but to an increase in actual traffic safety associated with the introduction of AVs into the traffic system.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

5. References

- Alahi, A., Goel, K., Ramanathan, V., Robicquet, A., Fei-Fei, L., & Savarese, S. (2016). Social LSTM: Human trajectory prediction in crowded spaces. *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. <https://doi.org/10.1109/cvpr.2016.110>
- Baldwin, C. L., Roberts, D. M., Barragan, D., Lee, J. D., Lerner, N., & Higgins, J. S. (2017). Detecting and quantifying mind wandering during simulated driving. *Frontiers in human neuroscience*, 11, 406. <https://doi.org/10.3389/fnhum.2017.00406>
- Beggiato, M., Hartwich, F., & Krems, J. (2019). Physiological correlates of discomfort in automated driving. *Transportation Research Part F: Traffic Psychology and Behaviour*, 66, 445–458. <https://doi.org/10.1016/j.trf.2019.09.018>
- Bieg, H. J., Daniilidou, C., Michel, B., & Sprung, A. (2020). Task load of professional drivers during level 2 and 3 automated driving. *Proceedings of the Human Factors and Ergonomics Society Europe*, 41-52.
- Chand, S. (2021). Modeling predictability of traffic counts at signalised intersections using Hurst exponent. *Entropy*, 23(2), 188. <https://doi.org/10.3390/e23020188>
- Choi, J. K., & Ji, Y. G. (2015). Investigating the importance of trust on adopting an autonomous vehicle. *International Journal of Human-Computer Interaction*, 31(10), 692–702. <https://doi.org/10.1080/10447318.2015.1070549>
- Cleij, D., Venrooij, J., Pretto, P., Katliar, M., Bülthoff, H. H., Steffen, D., ... & Schöner, H. P. (2019). Comparison between filter-and optimization-based motion cueing algorithms for driving simulation. *Transportation Research Part F: Traffic Psychology and Behaviour*, 61, 53-68. <https://doi.org/10.1016/j.trf.2017.04.005>
- Dictionary.com | Meanings & Definitions of English Words. (2023). In Dictionary.com. <https://dictionary.com/>
- Dietmayer, K. (2016). Predicting of machine perception for automated driving. *Autonomous Driving*, 407–424. https://doi.org/10.1007/978-3-662-48847-8_20
- Do, A. H., Balk, S. A., & Shurbutt, J. W. (2014). Why did the Pedestrian Cross the Road?. *Public Roads*, 77(6).
- Dong, C., & Dolan, J. M. (2018). Continuous behavioral prediction in lane-change for autonomous driving cars in Dynamic Environments. *2018 21st International Conference on Intelligent Transportation Systems (ITSC)*. <https://doi.org/10.1109/itsc.2018.8569772>



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

- Endsley, M. R. (1995). Toward a theory of situation awareness in Dynamic Systems. *Human Factors: The Journal of the Human Factors and Ergonomics Society*, 37(1), 32–64. <https://doi.org/10.1518/001872095779049543>
- Feng, F., Bao, S., Sayer, J. R., Flannagan, C., Manser, M., & Wunderlich, R. (2017). Can vehicle longitudinal jerk be used to identify aggressive drivers? an examination using naturalistic driving data. *Accident Analysis & Prevention*, 104, 125–136. <https://doi.org/10.1016/j.aap.2017.04.012>
- Figalová, N., Chuang, L. L., Pichen, J., Baumann, M., & Pollatos, O. (2022). Ambient light conveying reliability improves drivers' take-over performance without increasing mental workload. *Multimodal Technologies and Interaction*, 6(9), 73. <https://doi.org/10.3390/mti6090073>
- Figalová, N., Bieg, H. J., Schulz, M., Pichen, J., Baumann, M., Chuang, L. L., & Pollatos, O. (2023a). Fatigue and mental underload further pronounced in L3 conditionally automated driving: Results from an EEG experiment on a test track. In *Companion Proceedings of the 28th International Conference on Intelligent User Interfaces* (pp. 64–67).
- Figalová, N., Bieg, H. J., Reiser, J. E., Liu, Y. C., Baumann, M., Chuang, L., & Pollatos, O. (2023b). From Driver to Supervisor: Comparing Cognitive Load and EEG-based Attention Allocation across Automation Levels. *arXiv preprint arXiv:2306.08477*.
- Galéra, C., Orriols, L., M'Bailara, K., Laborey, M., Contrand, B., Ribéreau-Gayon, R., ... & Lagarde, E. (2012). Mind wandering and driving: responsibility case-control study. *Bmj*, 345. <https://doi.org/10.1136/bmj.e8105>
- Griffin, W., Haworth, N., & Twisk, D. (2020). Patterns in perceived crash risk among male and female drivers with and without substantial cycling experience. *Transportation Research Part F: Traffic Psychology and Behaviour*, 69, 1–12. <https://doi.org/10.1016/j.trf.2019.12.013>
- Higgins, J. S., Michael, J., Austin, R., Åkerstedt, T., Van Dongen, H. P., Watson, N., ... & Rosekind, M. R. (2017). Asleep at the wheel—the road to addressing drowsy driving. *Sleep*, 40(2), zsx001.
- He, X., Stapel, J., Wang, M., & Happee, R. (2022). Modelling perceived risk and trust in driving automation reacting to merging and braking vehicles. *Transportation Research Part F: Traffic Psychology and Behaviour*, 86, 178–195. <https://doi.org/10.1016/j.trf.2022.02.016>
- Hecht, T., Kratzert, S., & Bengler, K. (2020). The effects of a predictive HMI and different transition frequencies on acceptance, workload, usability, and gaze behavior during Urban Automated Driving. *Information*, 11(2), 73. <https://doi.org/10.3390/info11020073>



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

- Hou, R. Y.-T. (2021). Algorithm to improve the predictability for auto-vehicles' behaviors and avoid risk accumulation during driving. *2021 IEEE International Conference on Mechatronics (ICM)*. <https://doi.org/10.1109/icm46511.2021.9385696>
- Ito, M. (2019). The uncertainty that the autonomous car faces and predictability analysis for evaluation. *Communications in Computer and Information Science*, 83–95. https://doi.org/10.1007/978-3-030-28005-5_7
- ISO. (2018). *ISO 26262 Road vehicles- functional safety- part 1: vocabulary*.
- Kiefer, R. J., Flannagan, C. A., & Jerome, C. J. (2006). Time-to-collision judgments under realistic driving conditions. *Human Factors: The Journal of the Human Factors and Ergonomics Society*, 48(2), 334–345. <https://doi.org/10.1518/001872006777724499>
- Kiefer, R. J., LeBlanc, D. J., & Flannagan, C. A. (2005). Developing an inverse time-to-collision crash alert timing approach based on drivers' last-second braking and steering judgments. *Accident Analysis & Prevention*, 37(2), 295–303. <https://doi.org/10.1016/j.aap.2004.09.003>
- Kolekar, S., de Winter, J., & Abbink, D. (2020). Human-like driving behaviour emerges from a risk-based driver model. *Nature Communications*, 11(1). <https://doi.org/10.1038/s41467-020-18353-4>
- Kraus, J., Scholz, D., & Baumann, M. (2020). What's driving me? exploration and validation of a hierarchical personality model for trust in Automated Driving. *Human Factors: The Journal of the Human Factors and Ergonomics Society*, 63(6), 1076–1105. <https://doi.org/10.1177/0018720820922653>
- Lehsing, C., Fleischer, M., & Bengler, K. (2016, November). On the track of social interaction-A non-linear quantification approach in traffic conflict research. In *2016 IEEE 19th International Conference on Intelligent Transportation Systems (ITSC)* (pp. 2046-2051). IEEE.
- Lohani, M., Payne, B. R., & Strayer, D. L. (2019). A review of psychophysiological measures to assess cognitive states in real-world driving. *Frontiers in Human Neuroscience*, 13. <https://doi.org/10.3389/fnhum.2019.00057>
- Markkula, G., & Engström, J. (2017). Simulating effects of arousal on lane keeping: Are drowsiness and cognitive load opposite ends of a single spectrum. In *Tenth International Conference on Managing Fatigue, San Diego, CA*.
- Markkula, G., Madigan, R., Nathanael, D., Portouli, E., Lee, Y. M., Dietrich, A., ... & Merat, N. (2020). Defining interactions: A conceptual framework for understanding interactive behaviour in human and automated road traffic. *Theoretical Issues in Ergonomics Science*, 21(6), 728-752.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

- Matthews, G., Neubauer, C., Saxby, D. J., Wohleber, R. W., & Lin, J. (2019). Dangerous intersections? A review of studies of fatigue and distraction in the automated vehicle. *Accident Analysis & Prevention*, 126, 85-94. <https://doi.org/10.1016/j.aap.2018.04.004>
- Merat, N., Jamson, A. H., Lai, F. C. H., Daly, M., & Carsten, O. M. J. (2014). Transition to manual: Driver behaviour when resuming control from a highly automated vehicle. *Transportation Research Part F: Traffic Psychology and Behaviour*, 27, 274–282. <https://doi.org/10.1016/j.trf.2014.09.005>
- Mole, C. D., Lappi, O., Giles, O., Markkula, G., Mars, F., & Wilkie, R. M. (2019). Getting back into the loop: The perceptual-motor determinants of successful transitions out of automated driving. *Human Factors: The Journal of the Human Factors and Ergonomics Society*, 61(7), 1037–1065. <https://doi.org/10.1177/0018720819829594>
- Mösinger, P. (2017). *AI Companion-Trust in Piloted Driving*. Delft University of Technology.
- Mullakkal-Babu, F. A., Wang, M., He, X., van Arem, B., & Happee, R. (2020). Probabilistic field approach for motorway driving risk assessment. *Transportation Research Part C: Emerging Technologies*, 118(July), 102716. <https://doi.org/10.1016/j.trc.2020.102716>
- Nordhoff, S., Madigan, R., Van Arem, B., Merat, N., & Happee, R. (2020). Interrelationships among predictors of automated vehicle acceptance: A structural equation modelling approach. *Theoretical Issues in Ergonomics Science*, 1–26. <https://doi.org/10.1080/1463922x.2020.1814446>
- Nordhoff, S., Stapel, J., van Arem, B., & Happee, R. (2020). Passenger opinions of the perceived safety and interaction with automated shuttles: A test ride study with ‘hidden’ safety steward. *Transportation Research Part A: Policy and Practice*, 138, 508–524. <https://doi.org/10.1016/j.tra.2020.05.009>
- Norman, D. A. (1990). The ‘problem’ with automation: inappropriate feedback and interaction, not ‘over-automation’. *Philosophical Transactions of the Royal Society of London. B, Biological Sciences*, 327(1241), 585-593.
- Osswald, S., Wurhofer, D., Trösterer, S., Beck, E., & Tscheligi, M. (2012). Predicting information technology usage in the car. *Proceedings of the 4th International Conference on Automotive User Interfaces and Interactive Vehicular Applications - AutomotiveUI '12*. <https://doi.org/10.1145/2390256.2390264>



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

- Pauzzié A. (2008). A method to assess the driver mental workload: The Driving Activity Load Index (DALI). *IET Intelligent Transport Systems*, 2(4), 315. <https://doi.org/10.1049/iet-its:20080023>
- Rasouli, A., & Tsotsos, J. K. (2019). Autonomous vehicles that interact with pedestrians: A survey of theory and Practice. *IEEE Transactions on Intelligent Transportation Systems*, 21(3), 900–918. <https://doi.org/10.1109/tits.2019.2901817>
- Riesch, H. (2014). Why did the proton cross the road? humour and science communication. *Public Understanding of Science*, 24(7), 768–775. <https://doi.org/10.1177/0963662514546299>
- Rossner, P., & Bullinger, A. C. (2019). Do you shift or not? Influence of trajectory behaviour on perceived safety during automated driving on rural roads. In *HCI in Mobility, Transport, and Automotive Systems: First International Conference, MobiTAS 2019, Held as Part of the 21st HCI International Conference, HCII 2019, Orlando, FL, USA, July 26-31, 2019, Proceedings 21* (pp. 245-254). Springer International Publishing. https://doi.org/10.1007/978-3-030-22666-4_18
- Rumar, K. (1999). Transport safety visions, targets and strategies: beyond 2000. *First European Transport Safety lecture, Brussels, European Transport Safety Council*, 6-8.
- SAE, T. (2013). Definitions for Terms Related to On-Road Motor Vehicle Automated Driving Systems-J3016. *Society of Automotive Engineers: On-Road Automated Vehicle Standards Committee; SAE Pub. Inc., Warrendale, PA, USA*.
- Saffarian, M., Happee, R., & Winter, J. C. F. de. (2012). Why do drivers maintain short headways in fog? A driving-simulator study evaluating feeling of risk and lateral control during automated and manual car following. *Ergonomics*, 55(9), 971–985. <https://doi.org/10.1080/00140139.2012.691993>
- Sandamal, H. (2020, December 26). *Human computer interaction*. Medium. Retrieved November 15, 2022, from <https://hansasandamal.medium.com/human-computer-interaction-cb0f7cc2cf23>
- Shahini, F., & Zahabi, M. (2022). Effects of levels of automation and non-driving related tasks on driver performance and workload: A review of literature and meta-analysis. *Applied ergonomics*, 104, 103824. <https://doi.org/10.1016/j.apergo.2022.103824>
- Spence, C., & Driver, J. (2020). Multiple resources and multimodal interface design. In *Engineering psychology and cognitive ergonomics* (pp. 305-312). Routledge.
- Srivastava, A., & Sarrafzadeh, M. (2002). Predictability. *Proceedings of the 2002 IEEE/ACM International Conference on Computer-Aided Design - ICCAD '02*. <https://doi.org/10.1145/774572.774589>



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

- Surden, H., & Williams, M.-A. (2016). Technological opacity, predictability, and self-driving cars. *SSRN Electronic Journal*. <https://doi.org/10.2139/ssrn.2747491>
- Tenhundfeld, N. L., de Visser, E. J., Ries, A. J., Finomore, V. S., & Tossell, C. C. (2019). Trust and distrust of automated parking in a Tesla Model X. *Human Factors: The Journal of the Human Factors and Ergonomics Society*, 62(2), 194–210. <https://doi.org/10.1177/0018720819865412>
- Tzouras, P. G., Farah, H., Papadimitriou, E., van Oort, N., & Hagenzieker, M. (2020). Tram drivers' perceived safety and driving stress evaluation. A stated preference experiment. *Transportation Research Interdisciplinary Perspectives*, 7, 100205. <https://doi.org/10.1016/j.trip.2020.100205>
- Van Beinum, A., Farah, H., Wegman, F., & Hoogendoorn, S. (2016). Critical assessment of methodologies for operations and safety evaluations of freeway turbulence. *Transportation Research Record*, 2556(1), 39–48. <https://doi.org/10.3141/2556-05>
- Varotto, S. F., Farah, H., Toledo, T., van Arem, B., & Hoogendoorn, S. P. (2018). Modelling decisions of control transitions and target speed regulations in full-range adaptive cruise control based on risk allostasis theory. *Transportation Research Part B: Methodological*, 117, 318–341. <https://doi.org/10.1016/j.trb.2018.09.007>
- Vogelpohl, T., Kühn, M., Hummel, T., Gehlert, T., & Vollrath, M. (2018). Transitioning to manual driving requires additional time after automation deactivation. *Transportation Research Part F: Traffic Psychology and Behaviour*, 55, 464–482. <https://doi.org/10.1016/j.trf.2018.03.019>
- Vogelpohl, T., Kühn, M., Hummel, T., & Vollrath, M. (2019). Asleep at the automated wheel—Sleepiness and fatigue during highly automated driving. *Accident Analysis & Prevention*, 126, 70–84. <https://doi.org/10.1016/j.aap.2018.03.013>
- Wang, B., Hensher, D. A., & Ton, T. (2002). Safety in the road environment: a driver behavioural response perspective. *Transportation*, 29, 253–270.
- Wang, K., & Akar, G. (2019). Effects of neighborhood environments on perceived risk of self-driving: Evidence from the 2015 and 2017 Puget Sound Travel Surveys. *Transportation*, 46(6), 2117–2136. <https://doi.org/10.1007/s11116-019-10069-9>
- Wei, J., Bolton, M. L., & Humphrey, L. (2019, November). Subjective measurement of trust: Is it on the level?. In *Proceedings of the human factors and ergonomics society annual meeting* (Vol. 63, No. 1, pp. 212–216). Sage CA: Los Angeles, CA: SAGE Publications.
- World Health Organization. (2018). *Global status report on road safety 2018*. World Health Organization.



This project has received funding from the European Community's Horizon 2020 Framework Programme under grant agreement 860410

Deliverable 1.2 Perceived Safety and Predictability of Human/AV Interactions

- Wickens, C. D. (2008). Multiple Resources and mental workload. *Human Factors: The Journal of the Human Factors and Ergonomics Society*, 50(3), 449–455. <https://doi.org/10.1518/001872008x288394>
- Xu, Z., Zhang, K., Min, H., Wang, Z., Zhao, X., & Liu, P. (2018). What drives people to accept automated vehicles? findings from a field experiment. *Transportation Research Part C: Emerging Technologies*, 95, 320–334. <https://doi.org/10.1016/j.trc.2018.07.024>
- Zirk, A., Wiczorek, R., & Manzey, D. (2020). Do We Really Need More Stages? Comparing the Effects of Likelihood Alarm Systems and Binary Alarm Systems. *Human Factors*, 62(4), 540-552. <https://doi.org/10.1177/0018720819852023>
- Zoellick, J. C., Kuhlmei, A., Schenk, L., Schindel, D., & Blüher, S. (2019). Amused, accepted, and used? attitudes and emotions towards automated vehicles, their relationships, and predictive value for usage intention. *Transportation Research Part F: Traffic Psychology and Behaviour*, 65, 68–78. <https://doi.org/10.1016/j.trf.2019.07.009>
- Zhang, C., Berger, C., & Dozza, M. (2021). Social-IWSTCNN: A social interaction-weighted spatio-temporal convolutional neural network for pedestrian trajectory prediction in urban traffic scenarios. In *2021 IEEE Intelligent Vehicles Symposium (IV)* (pp. 1515-1522). IEEE.
- Zhang, C., & Berger, C. (2022a). Learning the pedestrian-vehicle interaction for pedestrian trajectory prediction. In *2022 8th International Conference on Control, Automation and Robotics (ICCAR)* (pp. 230-236). IEEE.
- Zhang, C., & Berger, C. (2022b). Analysing Factors Influencing Pedestrian Behavior in Urban Traffic Scenarios Using Deep Learning. *Accepted in Transport Research Arena (TRA), 2022. Elsevier.*
- Zhang, C. (2022). Predicting Pedestrian Behavior in Urban Traffic Scenarios Using Deep Learning Methods (Doctoral Licentiate dissertation, Chalmers University of Technology).
- Zhang, C., & Berger, C. (2023). Pedestrian Behavior Prediction Using Deep Learning Methods for Urban Scenarios: A Review. *IEEE Transactions on Intelligent Transportation Systems*.
- Zhang, C., Kalantari, A. H., Yang, Y., Ni, Z., Markkula, G., Merat, N., & Berger, C. (2023a). Cross or Wait? Predicting Pedestrian Interaction Outcomes at Unsignalized Crossings. In *2023 IEEE Intelligent Vehicles Symposium (IV)*. IEEE.
- Zhang, C., Ni, Z., & Berger, C. (2023b). Spatial-Temporal-Spectral LSTM: A Transferable Model for Pedestrian Trajectory Prediction. *IEEE Transactions on Intelligent Vehicles*.